


# UNIBLOC®-PD SIZE 200-0

## CAPACITY CHART

STAINLESS STD ROTORS, CLASS C. BASED ON WATER (1 CPS)

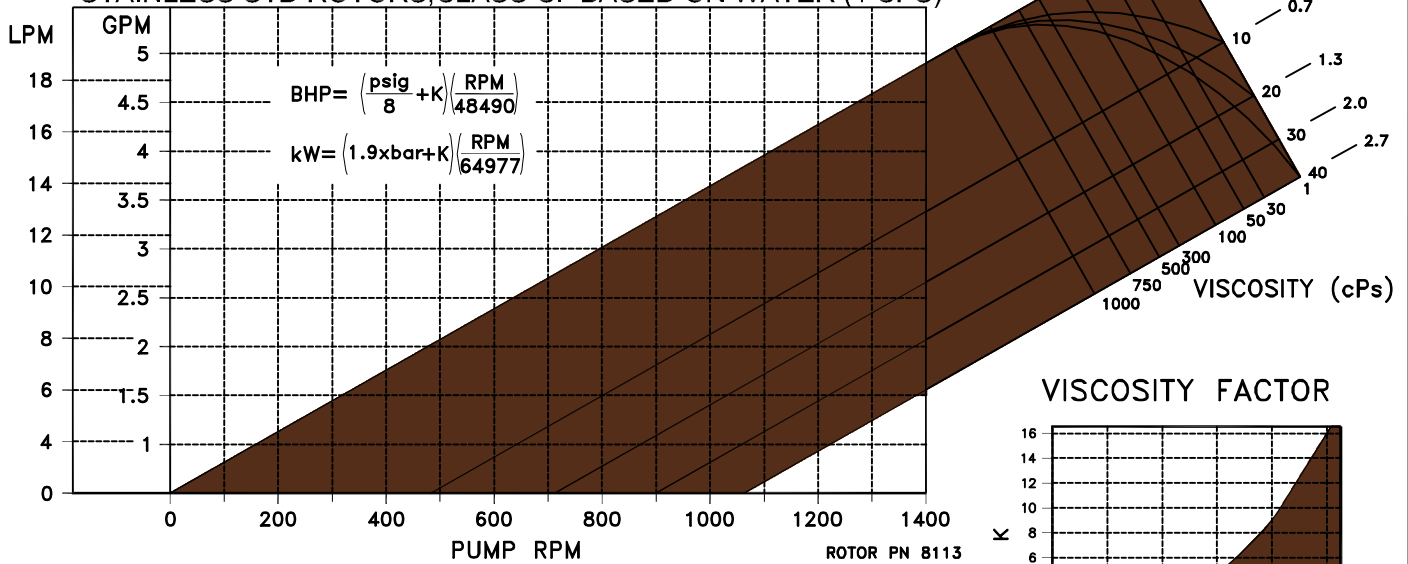


- \*MAX PRESS. @ AMBIENT TEMP. & STANDARD CLASS D ROTOR = 120 PSIG (8 BAR)
- \*MAX PRESS. @ AMBIENT TEMP. & HOT CLEARANCE CLASS E ROTOR = 165 PSIG (11 BAR)
- \*MAX TEMP. @ 15 PSI (1 BAR) & STANDARD CLASS D ROTOR = 257°F (125°C)
- \*MAX TEMP. @ 15 PSI (1 BAR) & HOT CLEARANCE CLASS E ROTOR = 400°F (205°C)

# UNIBLOC®-PD SIZE 200

## CAPACITY CHART

STAINLESS STD ROTORS, CLASS C. BASED ON WATER (1 CPS)

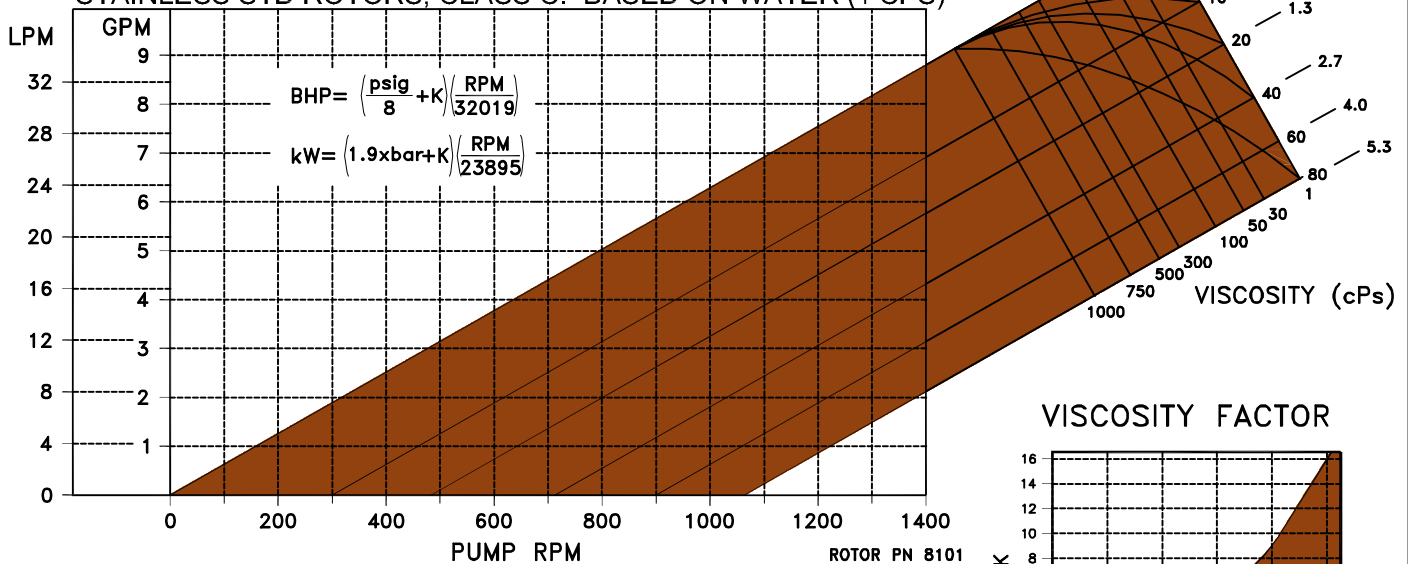

- \*MAX PRESS. @ AMBIENT TEMP. & STANDARD CLASS D ROTOR = 120 PSIG (8 BAR)
- \*MAX PRESS. @ AMBIENT TEMP. & HOT CLEARANCE CLASS E ROTOR = 165 PSIG (11 BAR)
- \*MAX TEMP. @ 15 PSI (1 BAR) & STANDARD CLASS D ROTOR = 257°F (125°C)
- \*MAX TEMP. @ 15 PSI (1 BAR) & HOT CLEARANCE CLASS E ROTOR = 400°F (205°C)

NOTE:  
 CAPACITIES VARY ±5%  
 \*USE HIGHER CLASS PRESSURE/TEMPERATURE ROTORS FOR MAX  
 PRESSURE/TEMPERATURE APPLICATIONS (CONTACT FACTORY FOR DETAILS)

<b>FLOWTECH</b> <sup>DIV.</sup>	
UNIBLOC®PUMP, INC. USA	
DWG. TITLE	CAPACITY CHARTS (CLASS C ROTORS)
SIZE	DWG. NO.
200-0 & 200	D206C
RELEASE DATE	SHEET
OCT. 01, 2009	1 OF 1