
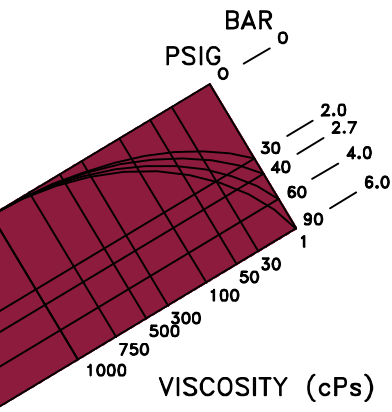


UNIBLOC®-PD SIZE 300

CAPACITY CHART

STAINLESS STD ROTORS, CLASS C. BASED ON WATER (1 CPS)


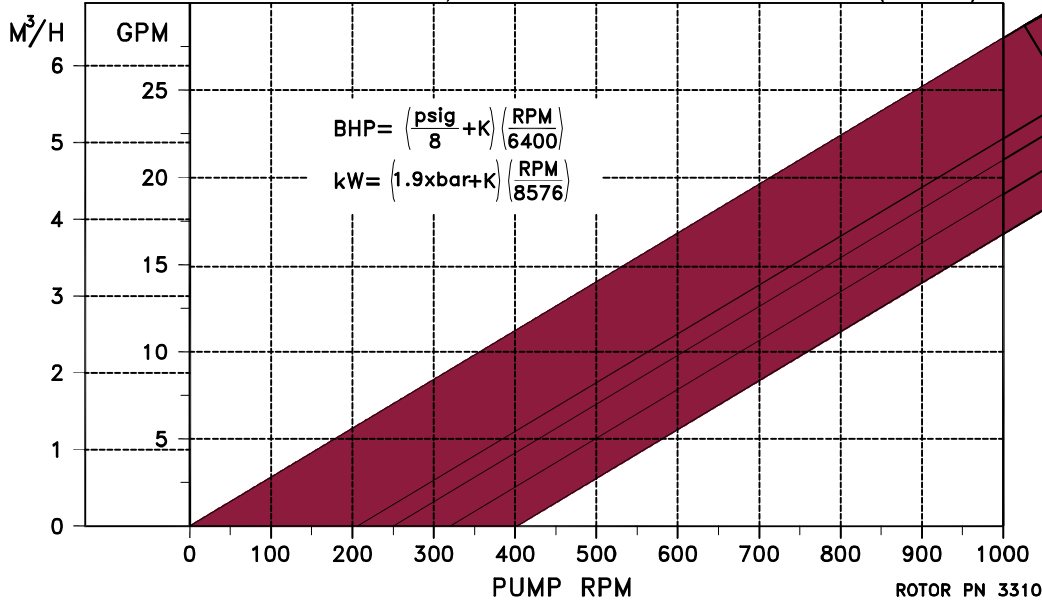


- *MAX PRESS. @ AMBIENT TEMP. & STANDARD CLASS D ROTOR = 150 PSIG (10 BAR)
- *MAX PRESS. @ AMBIENT TEMP. & HOT CLEARANCE CLASS E ROTOR = 250 PSIG (17 BAR)
- *MAX TEMP. @ 15 PSI (1 BAR) & STANDARD CLASS D ROTOR = 257°F (125°C)
- *MAX TEMP. @ 15 PSI (1 BAR) & HOT CLEARANCE CLASS E ROTOR = 400°F (205°C)

UNIBLOC®-PD SIZE 350

CAPACITY CHART

STAINLESS STD ROTORS, CLASS C. BASED ON WATER (1 CPS)

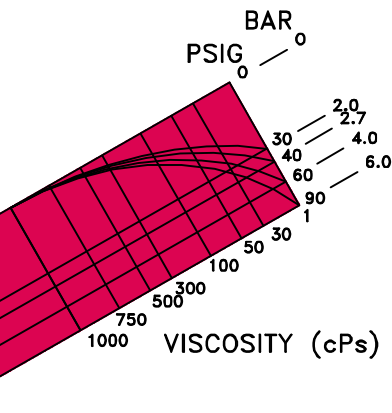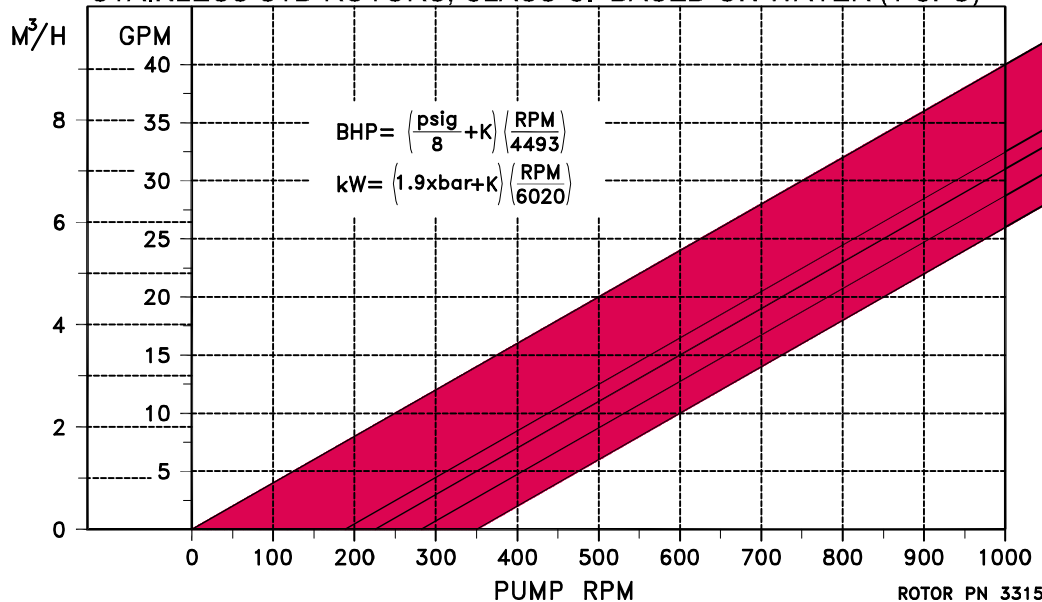

- *MAX PRESS. @ AMBIENT TEMP. & STANDARD CLASS D ROTOR = 120 PSIG (8 BAR)
- *MAX PRESS. @ AMBIENT TEMP. & HOT CLEARANCE CLASS E ROTOR = 225 PSIG (15 BAR)
- *MAX TEMP. @ 15 PSI (1 BAR) & STANDARD CLASS D ROTOR = 257°F (125°C)
- *MAX TEMP. @ 15 PSI (1 BAR) & HOT CLEARANCE CLASS E ROTOR = 400°F (205°C)

NOTE:
 CAPACITIES VARY ±5%
 *USE HIGHER CLASS ROTORS FOR MAX PRESSURE/TEMPERATURE APPLICATIONS
 (CONTACT FACTORY FOR DETAILS)

FLOWTECH DIV.	
UNIBLOC® PUMP, INC. USA	
DWG. TITLE CAPACITY CHARTS (CLASS C ROTORS)	
SIZE 300 & 350	DWG. NO. D305C
RELEASE DATE OCT. 01, 2009 SHEET 1 OF 1	