
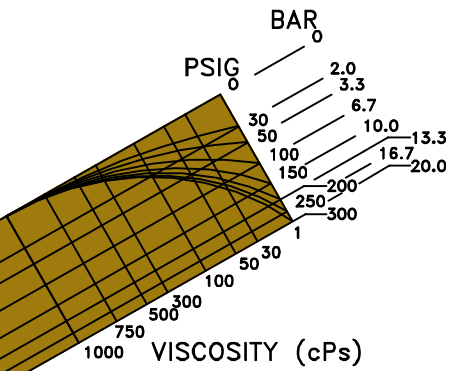



UNIBLOC[®]-PD SIZE 602

CAPACITY CHART

STAINLESS STD ROTORS, CLASS C. BASED ON WATER (1 CPS)

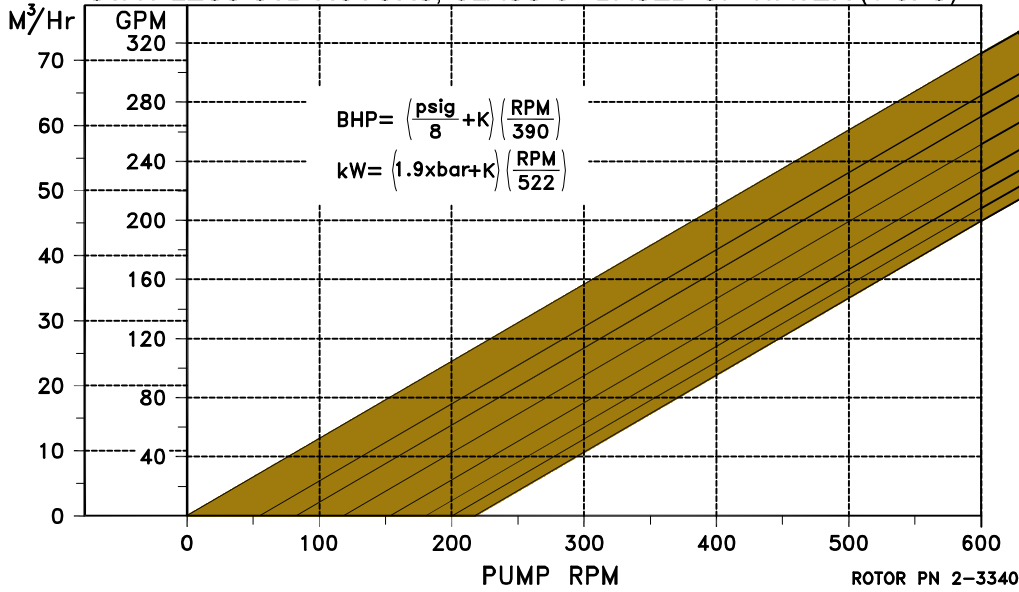

VISCOSITY FACTOR


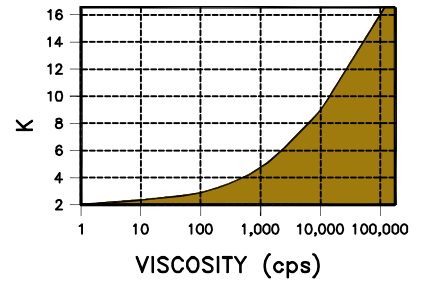


- *MAX PRESS. @ AMBIENT TEMP. & STANDARD CLASS D ROTOR = 300 PSIG (20 BAR)
- *MAX PRESS. @ AMBIENT TEMP. & HOT CLEARANCE CLASS E ROTOR = 375 PSIG (25 BAR)
- *MAX TEMP. @ 15 PSI (1 BAR) & STANDARD CLASS D ROTOR = 257°F (125°C)
- *MAX TEMP. @ 15 PSI (1 BAR) & HOT CLEARANCE CLASS E ROTOR = 400°F (205°C)


UNIBLOC[®]-PD SIZE 652

CAPACITY CHART

STAINLESS STD ROTORS, CLASS C. BASED ON WATER (1 CPS)

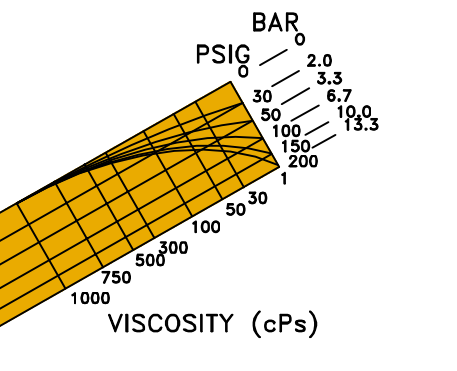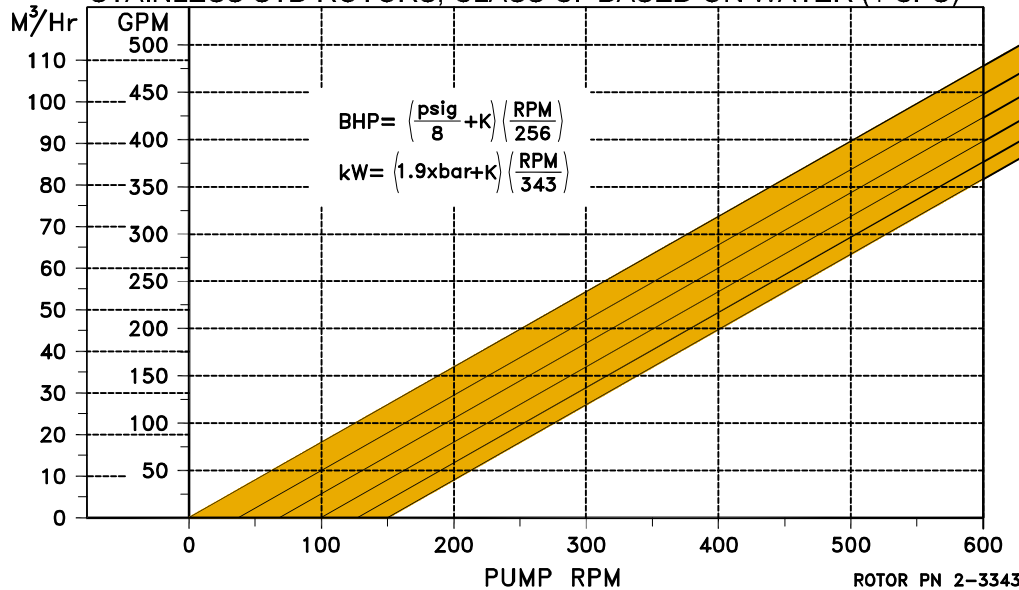

VISCOSITY FACTOR

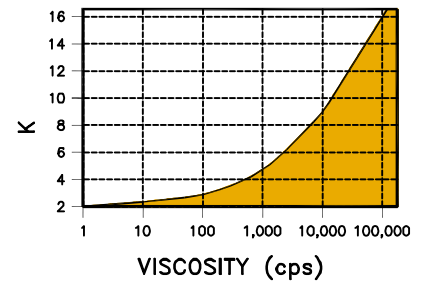

- *MAX PRESS. @ AMBIENT TEMP. & STANDARD CLASS D ROTOR = 300 PSIG (20 BAR)
- *MAX PRESS. @ AMBIENT TEMP. & HOT CLEARANCE CLASS E ROTOR = 375 PSIG (25 BAR)
- *MAX TEMP. @ 15 PSI (1 BAR) & STANDARD CLASS D ROTOR = 257°F (125°C)
- *MAX TEMP. @ 15 PSI (1 BAR) & HOT CLEARANCE CLASS E ROTOR = 400°F (205°C)

NOTE:
 CAPACITIES VARY ±5%
 *USE HIGHER CLASS ROTORS FOR MAX PRESSURE/TEMPERATURE APPLICATIONS
 (CONTACT FACTORY FOR DETAILS)

FLOWTECH ^{DIV.} UNIBLOC [®] PUMP, INC. USA	
DWG. TITLE CAPACITY CHARTS (CLASS C ROTORS)	
SIZE 602 & 652	DWG. NO. D2-605C
RELEASE DATE OCT. 01, 2009 SHEET 1 OF 1	